



## DECLARATION OF PERFORMANCE



**DoP: 0084**

for fischer Highbond-Anchor FHB II Inject (Bonded anchor for use in concrete) – EN

1. Unique identification code of the product-type: **DoP: 0084**
2. Intended use/es: **Post-installed fastening in cracked or uncracked concrete, see appendix, especially Annexes B 1 to B 7**
3. Manufacturer: **fischerwerke GmbH & Co. KG, Otto-Hahn-Straße 15, 79211 Denzlingen, Germany**
4. Authorised representative: --
5. System/s of AVCP: **1**
6. European Assessment Document: **ETAG 001; 2013-04**

European Technical Assessment: **ETA-16/0637; 2017-01-24**

Technical Assessment Body: **DIBt**

Notified body/ies: **1343 – MPA Darmstadt**

7. Declared performance/s:

**Mechanical resistance and stability (BWR 1), Safety in use (BWR 4)**

- **Characteristic resistance for tension and shear loads: See appendix, especially Annexes C 1 to C 4**
- **Displacements under shear and tension loads: See appendix, especially Annex C 5 to C 6**

**Safety in case of fire (BWR 2)**

- **Reaction to fire: Anchorages satisfy requirements for Class A 1**
- **Resistance to fire: NPD**

8. Appropriate Technical Documentation and/or Specific Technical Documentation: ---

The performance of the product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Signed for and on behalf of the manufacturer by:

Andreas Bucher, Dipl.-Ing.

Wolfgang Hengesbach, Dipl.-Ing., Dipl.-Wirtsch.-Ing.

Tumlingen, 2017-01-31

- This DoP has been prepared in different languages. In case there is a dispute on the interpretation the english version shall always prevail.
- The Appendix includes voluntary and complementary information in English language exceeding the (language-neutrally specified) legal requirements.

**Specific Part**

**1 Technical description of the product**

The fischer Highbond-Anchor FHB II is a torque controlled bonded anchor consisting of a mortar cartridge with mortar fischer FIS HB and an anchor rod FHB II - A L or FHB II - A S with hexagon nut and washer.

The anchor rod is placed into a drilled hole filled with injection mortar. The load transfer is realised by mechanical interlock of several cones in the bonding mortar and then via a combination of bonding and friction forces in the anchorage ground (concrete).

The product description is given in Annex A.

**2 Specification of the intended use in accordance with the applicable European Assessment Document**

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

**3 Performance of the product and references to the methods used for its assessment**

**3.1 Mechanical resistance and stability (BWR 1)**

Essential characteristic	Performance
Characteristic values under tension and shear load	See Annex C 1 to C 4
Displacements under tension and shear loads	See Annex C 5 and C 6

**3.2 Safety in case of fire (BWR 2)**

Essential characteristic	Performance
Reaction to fire	Anchorage satisfy requirements for Class A1
Resistance to fire	No performance assessed

**3.3 Hygiene, health and the environment (BWR 3)**

Regarding dangerous substances there may be requirements (e.g. transposed European legislation and national laws, regulations and administrative provisions) applicable to the products falling within the scope of this European Technical Assessment. In order to meet the provisions of Regulation (EU) No 305/2011, these requirements need also to be complied with, when and where they apply.

**3.4 Safety in use (BWR 4)**

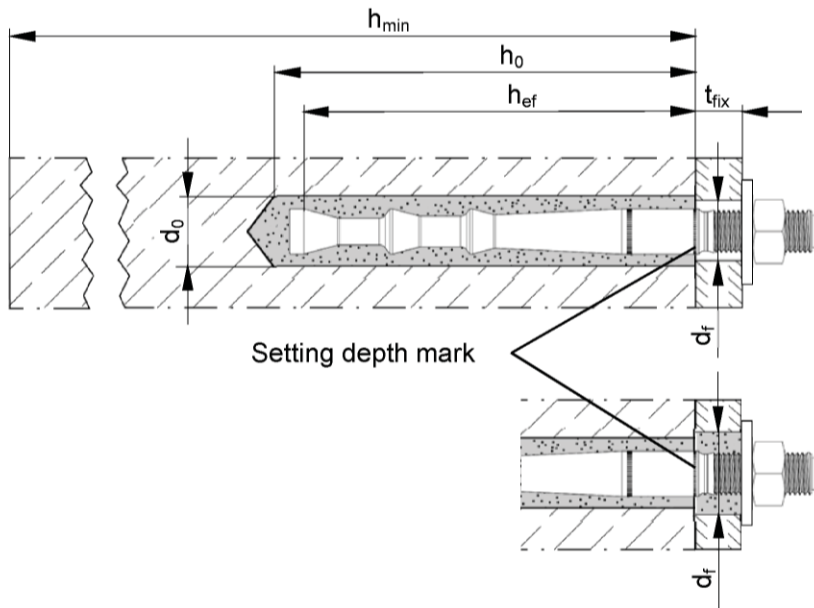
The essential characteristics regarding Safety in use are included under the Basic Works Requirement Mechanical resistance and stability.

**4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base**

In accordance with guideline for European technical approval ETAG 001, April 2013, used as European Assessment Document (EAD) according to Article 66 Paragraph 3 of Regulation (EU) No 305/2011, the applicable European legal act is: [96/582/EC].

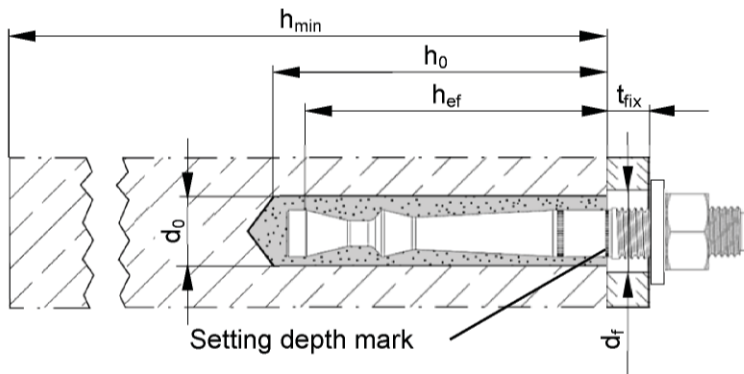
The system to be applied is: 1

**Installation conditions**



**Highbond-Anchore  
FHB II Inj-A L**  
Pre-positioned anchor

**Highbond-Anchore  
FHB II Inj-A L**  
Push through anchor  
annular gap filled with mortar




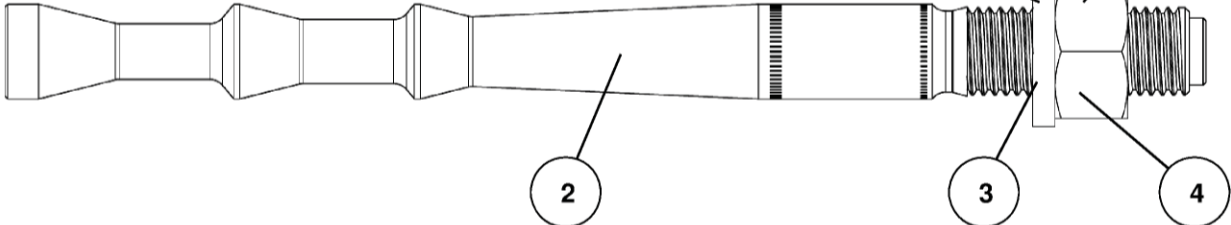
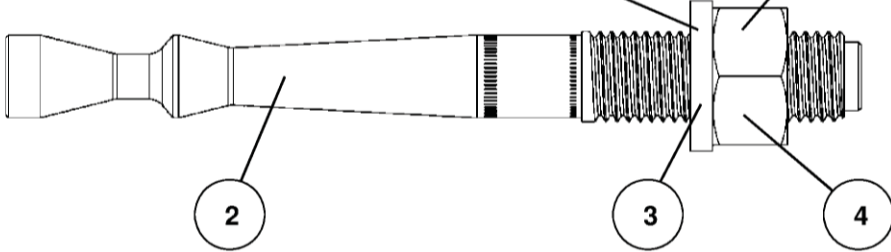


**Highbond-Anchore  
FHB II Inj-A S**  
Pre-positioned anchor  
and push through anchor

fischer Highbond-Anchore FHB II Inject

**Product description**  
Installation conditions



**Annex A 1**

<p>Sealing cap</p>		<p>Cartridge sizes 150 ml, 300 ml (Coaxial cartridge) 360 ml, 950 ml (Shuttle cartridge)</p>	<p><b>Imprint:</b> fischer FIS HB, processing notes, shelf-life, piston travel scale, curing times and processing times (depending on temperature), hazard code, size, volume</p>
		<p>Static mixer FIS MR or FIS UMR</p>	
<p>fischer Highbond-Anchor rod FHB II Inj-A L Size: M8, M10, M12, M16, M20, M24</p>		<p>Washer</p>	<p>Hexagon nut</p>
<p>fischer Highbond-Anchor rod FHB II Inj-A S Size: M10, M12, M16, M20, M24</p>		<p>Washer</p>	<p>Hexagon nut</p>
<p>fischer Highbond-Anchor FHB II Inject</p>			<p><b>Annex A 2</b></p>
<p><b>Product description</b> Cartridges / Static mixer / Steel elements</p>			

<b>Table A1: Materials</b>				
<b>Part</b>	<b>Designation</b>	<b>Material</b>		
1	Mortar cartridge	Mortar, hardener, filler		
	Steel grade	Steel, zinc plated	Stainless steel A4	High corrosion resistant steel C
2	fischer Highbond-Anchor rod FHB II Inj-A L or FHB II Inj-A S	Property class 8.8; EN ISO 898-1:2013 zinc plated $\geq 5 \mu\text{m}$ , EN ISO 4042:1999 A2K $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 12 \%$ fracture elongation	Property class 80 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; 1.4062, 1.4662, 1.4462 EN 10088-1:2014 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 12 \%$ fracture elongation	Property class 80 EN ISO 3506-1:2009 1.4565; 1.4529 EN 10088-1:2014 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 12 \%$ fracture elongation
3	Washer ISO 7089:2000	zinc plated $\geq 5 \mu\text{m}$ , EN ISO 4042:1999 A2K	1.4401; 1.4404; 1.4578;1.4571; 1.4439; 1.4362 EN 10088-1:2014	1.4565;1.4529 EN 10088-1:2014
4	Hexagon nut	Property class 8; EN ISO 898-2:2012 zinc plated $\geq 5 \mu\text{m}$ , ISO 4042:1999 A2K	Property class 70 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362 EN 10088-1:2014	Property class 70 EN ISO 3506-1:2009 1.4565; 1.4529 EN 10088-1:2014
fischer Highbond-Anchor FHB II Inject				<b>Annex A 3</b>
Product description Materials				

**Specifications of intended use (part 1)**

**Table B1:** Overview use and performance categories

Anchorages subject to		fischer Injection mortar FIS HB with...			
		FHB II Inj-A L		FHB II Inj-A S	
					
Hammer drilling with standard drill bit		all sizes			
Static or quasi static load, in	uncracked concrete	all sizes	Tables: C1, C3, C5	all sizes	Tables: C2, C4, C6
	cracked concrete				
Use category	dry or wet concrete	all sizes			
Kind of intallation	Pre-positioned anchor	all sizes			
	Push through anchor	all sizes			
Installation temperature		-5 °C to +40 °C			
In-service temperature		-40 °C to +80 °C (max. long term temperature +50 °C and max. short term temperature +80 °C)			

fischer Highbond-Anchor FHB II Inject

**Intended Use**  
Specifications (part 1)

**Annex B 1**

**Specifications of intended use (part 2)**

**Base materials:**

- Reinforced or unreinforced normal weight concrete Strength classes C20/25 to C50/60 according to EN 206-1:2000

**Use conditions (Environmental conditions):**

- Structures subject to dry internal conditions (zinc coated steel, stainless steel or high corrosion resistant steel)
- Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition, if no particular aggressive conditions exist (stainless steel or high corrosion resistant steel)
- Structures subject to external atmospheric exposure, to permanently damp internal conditions or in other particular aggressive conditions (high corrosion resistant steel)

Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used)

**Design:**

- Anchorages have to be designed by a responsible engineer with experience of concrete anchor design
- Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.)
- Anchorages under static or quasi-static actions are designed in accordance with
- EOTA ETAG 001 Annex C, 08/2010 or CEN/TS 1992-4:2009

**Installation:**

- Anchor installation is to be carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site
- In case of aborted hole: The hole shall be filled with mortar
- Observe the effective anchorage depth
- Overhead installation is allowed

fischer Highbond-Anchor FHB II Inject

**Intended Use**  
Specifications (part 2)

**Annex B 2**

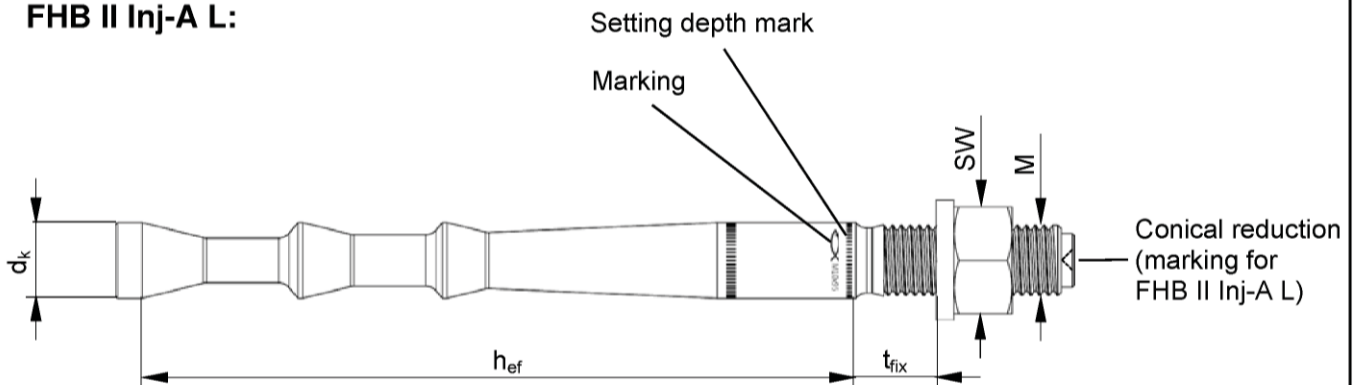


**Table B2:** Installation parameters for fischer Highbond-Anchor rods FHB II Inj-A L

Size FHB II Inj-A L		M8	M10	M12		M16			M20	M24	
		x 60	x 95	x 100	x 120	x 125	x 145	x 160	x 210	x 210	
Cone diameter	$d_k$	9,4	10,7	12,5		16,8			23,0		
Width across flats	SW	13	17	19		24			30	36	
Nominal drill bit diameter	$d_o$	10	12	14		18			25		
Drill hole depth	$h_o$	66	101	106	126	131	151	166	216		
Effective anchorage depth	$h_{ef}$	60	95	100	120	125	145	160	210		
Minimum spacing and minimum edge distance	$s_{min} = c_{min}$	40		50		55	60	70	90		
Diameter of clearance hole in the fixture <sup>1)</sup>	pre-positioned anchorage	$d_f \leq$	9	12	14		18			22	26
	push through anchorage	$d_f \leq$	11	14	16		20			26	
Minimum thickness of concrete member	$h_{min}$	100	140		170		190	220	280		
Installation torque	$T_{inst}$ [Nm]	15	20	40		60			100		
Thickness of fixture	$t_{fix} \leq$ [mm]	1500									

<sup>1)</sup> For larger clearance holes in the fixture see EOTA ETAG 001 Annex C, 08/2010 or CEN/TS 1992-4-:2009

**FHB II Inj-A L:**



**Marking:**

Work symbol, size of anchor, setting depth. e. g.:  $\varnothing$  M10x95

For stainless steel additional **A4**. For high corrosion resistant steel additional **C**.

For high corrosion resistant steel additional marking **C** also on the face.

fischer Highbond-Anchor FHB II Inject

**Intended Use**

Installation parameters fischer Highbond-Anchor rod FHB II Inj-A L

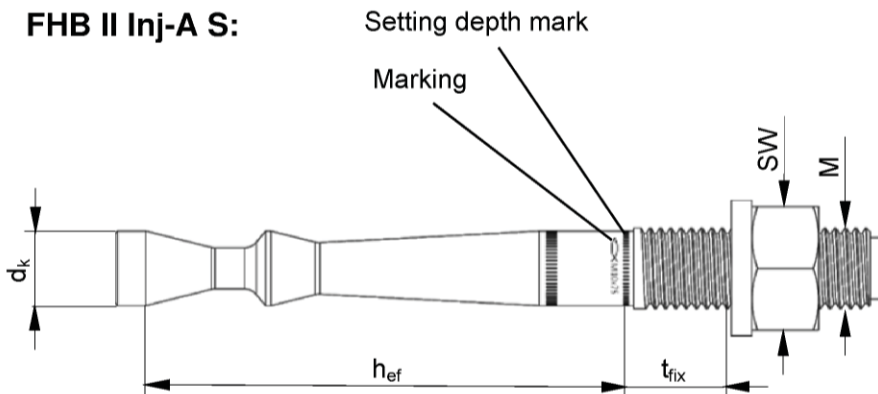
**Annex B 3**

**Table B3:** Installation parameters for fischer Highbond-Anchor rods FHB II Inj-A S

Size FHB II Inj-A S		M10		M12	M16	M20	M24
		x 60	x 75	x 75	x 95	x 170	x 170
Cone diameter	$d_k$	9,4		11,3	14,5	23,0	
Width across flats	SW	17		19	24	30	36
Nominal drill bit diameter	$d_0$	10		12	16	25	
Drill hole depth	$h_0$	66	81	81	101	176	
Effective anchorage depth	$h_{ef}$	60	75	75	95	170	
Minimum spacing and minimum edge distance	$s_{min} = c_{min}$	40			50	80	
Diameter of clearance hole in the fixture <sup>1)</sup>	pre-positioned anchorage	$d_f \leq 12$		14	18	22	26
	push through anchorage	$d_f \leq 12$		14	18	26	
Minimum thickness of concrete member	$h_{min}$	100	120		150	240	
Installation torque	$T_{inst}$	[Nm] 15		30	50	100	
Thickness of fixture	$t_{fix} \leq$	[mm] 1500					

<sup>1)</sup> For larger clearance holes in the fixture see EOTA ETAG 001 Annex C, 08/2010 or CEN/TS 1992-4-:2009

**FHB II Inj-A S:**



**Marking:**

Work symbol, size of anchor, setting depth. e. g.: M10x75

For stainless steel additional **A4**. For high corrosion resistant steel additional **C**.  
For high corrosion resistant steel additional marking **C** also on the face.

fischer Highbond-Anchor FHB II Inject

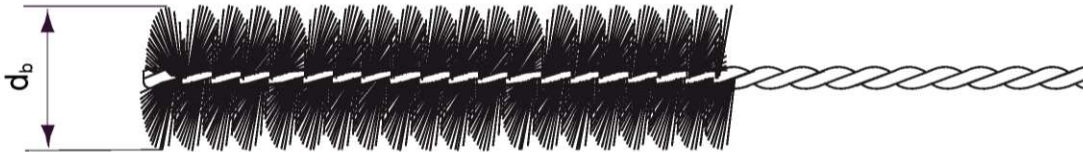
**Intended Use**

Installation parameters fischer Highbond-Anchor rod FHB II Inj-A S

**Annex B 4**

**Table B4: Parameters of steel brush FIS BS**

Drill bit diameter	$d_0$	[mm]	10	12	14	16	18	25
Steel brush diameter	$d_b$		11	13	16	20		27



**Table B5: Maximum processing time of the mortar FIS HB and minimum curing time**  
 (During the curing time of the mortar the concrete temperature may not fall below the listed minimum temperature)

System temperature [°C]	Maximum processing time $t_{work}$ [minutes]	Minimum curing time <sup>1)</sup> $t_{cure}$ [minutes]
-5 to ±0	----	6 hours
> +1 to +5	----	3 hours
> +6 to +10	15	90
> +11 to +20	6	35
> +21 to +30	4	20
> +31 to +40	2	12

<sup>1)</sup> In wet concrete the curing times must be doubled

fischer Highbond-Anchor FHB II Inject




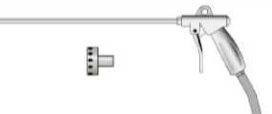
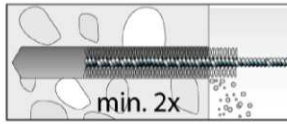




**Intended Use**  
 Parameters of steel brush  
 Processing times and curing times

**Annex B 5**

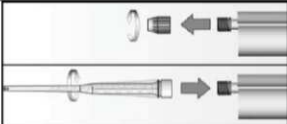

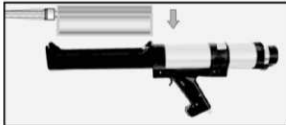



**Installation instruction part 1**

**Installation with injection mortar FIS HB**

**Drilling and cleaning the hole**

1		Drill the hole with hammer drill. Drill hole diameter $d_0$ and drill hole depth $h_0$ see <b>Tables B2, B3</b>
2		Blow out the drill hole twice. If necessary, remove standing water out of the bore hole.
		For drill hole diameter $d_0 < 25$ mm with hand-blowout or oil-free compressed air
		For drill hole diameter $d_0 = 25$ mm with oil-free compressed air ( $p \geq 6$ bar) Use a cleaning nozzle.
3		Brush the bore hole twice. Corresponding brushes see <b>Table B4</b>
		
4		Blow out the drill hole twice.
		For drill hole diameter $d_0 < 25$ mm with hand-blowout or oil-free compressed air
		For drill hole diameter $d_0 = 25$ mm with oil-free compressed air ( $p \geq 6$ bar) Use a cleaning nozzle.

**Preparing the cartridge**

5		Remove the sealing cap Screw on the static mixer (the spiral in the static mixer must be clearly visible)
6		 Place the cartridge into the dispenser
7		 Extrude approximately 10 cm of material until the resin is evenly grey in colour. Do not use mortar that is not uniformly grey
		Observe the processing time, $t_{work}$ see <b>Table B5</b> If the processing time is exceeded, use a new static mixer and if necessary remove encrusted material in the cartridge mouth.

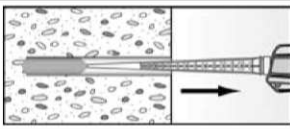
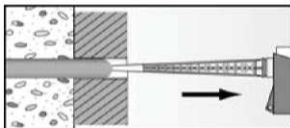
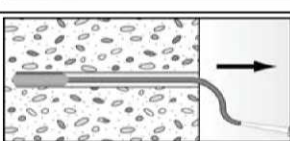
fischer Highbond-Anchor FHB II Inject

**Intended use**  
Installation instruction part 1

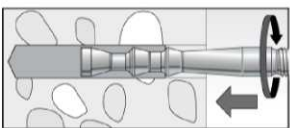
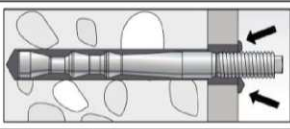



**Annex B 6**

### Installation instruction part 2

#### Injection of the mortar

8		Fill approximately 2/3 of the drill hole with mortar. Exact quantity of mortar (travel scale on the cartridge) see instruction sheet. Fill the drill hole with mortar, always begin from the bottom of the hole to avoid bubbles
		<b>Push-through installation:</b> By using Highbond-Anchor rods <b>FHB II Inj-A L</b> the drill hole in the fixture must be also filled with mortar. If Highbond-Anchor rods <b>FHB II Inj-A S</b> are used, this is not necessary.
		For drill hole depth $\geq 170$ mm use an extension tube

#### Installation Highbond-Anchor rod FHB II Inj-A L and FHB II Inj-A S

9		Only use clean and oil-free anchor rods. Push the anchor rod down to the bottom of the hole, turning it slightly while doing so.			
10		After inserting the anchor rod, excess mortar must be emerged around the anchor rod			
		For overhead installations support the anchor rod with wedges. (e.g. fischer centering wedges)			
11		Wait for the specified curing time $t_{cure}$ see <b>Table B5</b>	12		Mounting the fixture $T_{inst}$ see <b>Tables B2 and B3</b>

fischer Highbond-Anchor FHB II Inject

**Intended use**  
Installation instruction part 2

**Annex B 7**

**Table C1: Characteristic values under static or quasi-static tension load for fischer Highbond-Anchors FHB II Inj-A L**

Size FHB II Inj-A L		M8	M10	M12		M16			M20	M24
		x	x	x	x	x	x	x	x	x
		60	95	100	120	125	145	160	210	210
<b>Bearing capacity under tensile load, steel failure</b>										
Characteristic resistance $N_{Rk,s}$	Steel, zinc plated	[kN]	25,1	34,4	49,8		96,6			137,6
	Stainless steel A4		25,1	34,4	49,8		96,6			137,6
	High corrosion resistant steel C									
<b>Partial safety factors<sup>1)</sup></b>										
Partial safety factor $\gamma_{Ms,N}$	Steel, zinc plated	[-]	1,5 <sup>1)</sup>							
	Stainless steel A4		1,5 <sup>1)</sup>							
	High corrosion resistant steel C		1,5 <sup>1)</sup>							
<b>Pullout failure in cracked concrete C20/25</b>										
Characteristic resistance	$N_{Rk,p}$	[kN]	--- <sup>2)</sup>							
<b>Pullout and splitting failure in uncracked concrete C20/25</b>										
Characteristic resistance	$N_{Rk,p}$	[kN]	--- <sup>2)</sup>							
Edge distance	$c_{cr,sp}$	[mm]	300	476	380	600	375	500	580	630
Spacing	$s_{cr,sp}$		150	238	190	300	188	250	290	315
<b>Pullout and splitting failure in uncracked concrete C20/25</b>										
Characteristic resistance	$N_{Rk,p}$ <sup>3)</sup>	[kN]	20	35	40	50	--- <sup>2)</sup>	75	95	--- <sup>2)</sup>
Edge distance	$c_{cr,sp}$	[mm]	1,5 $h_{ef}$							
Spacing	$s_{cr,sp}$		3,0 $h_{ef}$							
<b>Factors for the compressive strength of concrete &gt; C20/25</b>										
Increasing factor for $N_{Rk,p}$	C25/30	$\Psi_c$	[-]	1,10						
	C30/37			1,22						
	C35/45			1,34						
	C40/50			1,41						
	C45/55			1,48						
	C50/60			1,55						
<b>Factors acc. to CEN/TS 1992-4:2009 Section 6.2.2.3</b>										
Uncracked concrete	$k_{ucr}$	[-]	10,1							
Cracked concrete	$k_{cr}$		7,2							
<b>Concrete cone failure</b>										
Effective anchorage depth	$h_{ef}$	[mm]	60	95	100	120	125	145	160	210
Partial safety factor <sup>1)4)</sup>	$\gamma_{Mc}$	[-]	1,5	1,5						

<sup>1)</sup> In absence of other national regulations

<sup>2)</sup> Not decisive (proof of splitting failure acc. ETAG 001, Annex C)

<sup>3)</sup> Proof of splitting failure acc. ETAG 001, Annex C, (Section 5.3). Instead of  $N_{Rk,c}^0$  use  $N_{Rk,p}$ .

<sup>4)</sup>  $\gamma_2 = 1,0$  is included

fischer Highbond-Anchor FHB II Inject

**Performances**

Characteristic values under static or quasi-static tension load for fischer Highbond-Anchor FHB II Inj-A L (uncracked or cracked concrete)

**Annex C 1**

**Table C2: Characteristic values under static or quasi-static tension load for fischer Highbond-Anchors FHB II Inj-A S**

Size FHB II Inj-A S		M10		M12	M16	M20	M24
		x 60	x 75	x 75	x 95	x 170	x 170
<b>Bearing capacity under tensile load, steel failure</b>							
Characteristic resistance $N_{Rk,s}$	Steel, zinc plated	[kN]	25,1	34,4	61,6	128,5	
	Stainless steel A4 High corrosion resistant steel C		25,1	34,4	61,6	128,5	
<b>Partial safety factors<sup>1)</sup></b>							
Partial safety factor $\gamma_{Ms,N}$	Steel, zinc plated	[-]	1,5 <sup>1)</sup>				
	Stainless steel A4		1,5 <sup>1)</sup>				
	High corrosion resistant steel C		1,5 <sup>1)</sup>				
<b>Pullout failure in cracked concrete C20/25</b>							
Characteristic resistance	$N_{Rk,p}$	[kN]	--- <sup>2)</sup>				
<b>Pullout and splitting failure in uncracked concrete C20/25</b>							
Characteristic resistance	$N_{Rk,p}$	[kN]	--- <sup>2)</sup>				
Edge distance	$c_{cr,sp}$	[mm]	300		340	510	
Spacing	$s_{cr,sp}$		150		170	255	
<b>Pullout and splitting failure in uncracked concrete C20/25</b>							
Characteristic resistance	$N_{Rk,p}$ <sup>3)</sup>	[kN]	20	25	40	--- <sup>2)</sup>	
Edge distance	$c_{cr,sp}$	[mm]	1,5 $h_{ef}$				
Spacing	$s_{cr,sp}$		3,0 $h_{ef}$				
<b>Factors for the compressive strength of concrete &gt; C20/25</b>							
Increasing factor for $N_{Rk,p}$	C25/30	$\Psi_c$	[-]	1,10			
	C30/37			1,22			
	C35/45			1,34			
	C40/50			1,41			
	C45/55			1,48			
	C50/60			1,55			
<b>Factors acc. to CEN/TS 1992-4:2009 Section 6.2.2.3</b>							
Uncracked concrete	$k_{ucr}$	[-]	10,1				
Cracked concrete	$k_{cr}$		7,2				
<b>Concrete cone failure</b>							
Effective anchorage depth	$h_{ef}$	[mm]	60	75	95	170	
Partial safety factor <sup>1)4)</sup>	$\gamma_{Mc}$	[-]	1,5	1,5			

<sup>1)</sup> In absence of other national regulations

<sup>2)</sup> Not decisive (proof of splitting failure acc. ETAG 001, Annex C)

<sup>3)</sup> Proof of splitting failure acc. ETAG 001, Annex C, (Section 5.3). Instead of  $N_{Rk,c}^0$  use  $N_{Rk,p}$ .

<sup>4)</sup>  $\gamma_2 = 1,0$  is included

fischer Highbond-Anchor FHB II Inject

**Performances**

Characteristic values under static or quasi-static tension load for fischer Highbond-Anchor FHB II Inj-A S (uncracked or cracked concrete)

**Annex C 2**

**Table C3: Characteristic values under static or quasi-static shear load for fischer Highbond-Anchor FHB II Inj-A L (uncracked and cracked concrete)**

Size FHB II Inj-A L		M8	M10	M12		M16			M20	M24	
		x	x	x	x	x	x	x	x	x	
		60	95	100	120	125	145	160	210	210	
<b>Bearing capacity under shear load, steel failure</b>											
<b>without lever arm</b>											
Characteristic resistance	Steel, zinc plated	$V_{Rk,s}$	[kN]	13,7	20,8	30,3	56,3			87,9	126,9
	Stainless steel A4 High corrosion resistant steel C			14,6	23,2	33,7	62,7			97,9	141
<b>with lever arm</b>											
Characteristic bending moment	Steel, zinc plated	$M^0_{Rk,s}$	[Nm]	31	62	105	266			519	896
	Stainless steel A4 and High corrosion resistant steel C			31	62	105	266			519	896
<b>Partial safety factors</b>											
Partial safety factor <sup>1)</sup>	$\gamma_{Ms,V}$	[-]	1,25								
Ductility factor acc. to CEN/TS 1992-4-5:2009 Section 6.3.2.1	$k_2$	[-]	1,0								
<b>Concrete pry-out failure</b>											
Factor k acc. TR029 Section 5.2.3.3 or $k_3$ acc. CEN/TS 1992-4-5:2009 Section 6.3.3	$k_{(3)}$	[-]	2,0								
Partial safety factors <sup>1)</sup>	$\gamma_{Mcp}$		1,5								
<b>Concrete edge failure</b>											
Effective length of anchor	$l_f$	[mm]	60	95	100	112	125	144	200		
Calculation diameter	d		10	12	14		18			25	
Partial safety factor <sup>1)</sup>	$\gamma_{Mc}$	[-]	1,5								

<sup>1)</sup> In absence of other national regulations

fischer Highbond-Anchor FHB II Inject

**Leistungen**

Charakteristische Werte für statische oder quasi-statische Querkzugbelastung von fischer Highbond- Ankern FHB II – A L (ungerissener oder gerissener Beton)

**Annex C 3**



**Table C4: Characteristic values under static or quasi-static shear load for fischer Highbond-Anchor FHB II Inj-A S (uncracked and cracked concrete)**

Size FHB II Inj-A S		M10		M12	M16	M20	M24	
		x 60	x 75	x 75	x 95	x 170	x 170	
<b>Bearing capacity under shear load, steel failure</b>								
<b>without lever arm</b>								
Characteristic resistance	Steel, zinc plated	$V_{Rk,s}$	[kN]	19,7	27,3	50,8	80,3	114,2
	Stainless steel A4			24,1	33,7	62,7	97,9	124,5
	High corrosion resistant steel C			24,1	33,7	62,7	97,9	141
<b>with lever arm</b>								
Characteristic bending moment	Steel, zinc plated	$M^0_{Rk,s}$	[Nm]	62	105	266	519	896
	Stainless steel A4 and High corrosion resistant steel C			62	105	266	519	896
<b>Partial safety factors</b>								
Partial safety factor <sup>1)</sup>	$\gamma_{Ms,V}$	[-]	1,25					
Ductility factor acc. to CEN/TS 1992-4-5:2009 Section 6.3.2.1	$k_2$	[-]	1,0					
<b>Concrete pry-out failure</b>								
Factor k acc. TR029 Section 5.2.3.3 or $k_3$ acc.CEN/TS 1992-4-5:2009 Section 6.3.3	$k_{(3)}$	[-]	2,0					
Partial safety factors <sup>1)</sup>	$\gamma_{Mcp}$	[-]	1,5					
<b>Concrete edge failure</b>								
Effective length of anchor	$l_f$	[mm]	60	75	95	170		
Calculation diameter	d		10	12	16	25		
Partial safety factor <sup>1)</sup>	$\gamma_{Mc}$	[-]	1,5					

<sup>1)</sup> In absence of other national regulations

fischer Highbond-Anchor FHB II Inject

**Performances**

Characteristic values under static or quasi-static shear load for fischer Highbond-Anchor FHB II Inj-A S (uncracked and cracked concrete)

**Annex C 4**

**Table C5: Displacement** for fischer **Highbond-Anchor FHB II Inj-A L**

Size FHB II Inj-A L	M8	M10	M12		M16			M20	M24
	x 60	x 95	x 100	x 120	x 125	x 145	x 160	x 210	x 210
<b>Displacement under tension load</b>									
<b>Cracked concrete</b>									
Tension load [kN]	6,6	15,9	17,1	22,5	24,0	30,0	34,7	52,2	52,2
$\delta_{N0}$ [mm]	0,8				0,6				
$\delta_{N\infty}$ [mm]	1,7								
<b>Uncracked concrete</b>									
Tension load [kN]	9,3	22,3	24,0	31,6	33,6	42,0	48,7	73,2	73,2
$\delta_{N0}$ [mm]	0,2	0,4						0,6	
$\delta_{N\infty}$ [mm]	1,7								
<b>Displacement under shear load</b>									
<b>Uncracked or cracked concrete</b>									
<b>Steel zinc plated</b>									
Shear load [kN]	7,8	11,9	17,3		32,2			50,2	72,5
$\delta_{V0}$ [mm]	1,2		1,3			3,5			
$\delta_{V\infty}$ [mm]	1,8		2,0			5,3			
<b>Stainless steel A4</b>									
Shear load [kN]	8,7	13,3	19,3		35,8			55,9	80,6
$\delta_{V0}$ [mm]	1,0		1,1		2,2			3,5	
$\delta_{V\infty}$ [mm]	1,5		1,7		3,3			5,3	
<b>High corrosion resistant steel C</b>									
Shear load [kN]	8,7	13,3	19,3		35,8			55,9	80,6
$\delta_{V0}$ [mm]	1,2		1,3		2,4			3,7	
$\delta_{V\infty}$ [mm]	1,8		2,0		3,6			5,6	

fischer Highbond-Anchor FHB II Inject

**Performances**

Displacement for fischer Highbond-Anchor FHB II Inj-A L

**Annex C 5**

**Table C6: Displacement** for fischer **Highbond-Anchor FHB II Inj-A S**

Size FHB II Inj-A S	M10		M12	M16	M20	M24
	x 60	x 75	x 75	x 95	x 170	x 170
<b>Displacement under tension load</b>						
<b>Cracked concrete</b>						
Tension load [kN]	6,6	11,1	15,9	38,0		
$\delta_{N0}$ [mm]	0,8	0,3	0,4	0,6		
$\delta_{N\infty}$	1,7					
<b>Uncracked concrete</b>						
Tension load [kN]	9,3	15,6	22,3	53,3		
$\delta_{N0}$ [mm]	0,2			0,5		
$\delta_{N\infty}$	1,7					
<b>Displacement under shear load</b>						
<b>Uncracked or cracked concrete</b>						
<b>Steel zinc plated</b>						
Shear load [kN]	11,3	12,7	29,0	45,9	65,3	
$\delta_{V0}$ [mm]	1,2	1,5	2,8			
$\delta_{V\infty}$	1,8	2,3	4,2			
<b>Stainless steel A4</b>						
Shear load [kN]	13,8	19,3	35,8	55,9	71,1	
$\delta_{V0}$ [mm]	1,0	1,1	2,2	3,5		
$\delta_{V\infty}$	1,5	1,7	3,3	5,3		
<b>High corrosion resistant steel C</b>						
Shear load [kN]	13,8	19,3	35,8	55,9	80,6	
$\delta_{V0}$ [mm]	1,2	1,3	2,4	3,7	5,0	
$\delta_{V\infty}$	1,8	2,0	3,6	5,6	7,5	

fischer Highbond-Anchor FHB II Inject

**Performances**

Displacement for fischer Highbond-Anchor FHB II Inj-A S

**Annex C 6**